




PROLUNGHE REGISTRABILI NORMALI - DIN - CNOMO
NORMAL ADJUSTABLE EXTENSIONS - DIN - CNOMO
EMBOUT PROLONGES REGISTRABLE STANDARDS - DIN - CNOMO
CASQUILLO REGULABLE PROLONGADO - DIN - CNOMO

Attacco Tr. - DIN 6327

Dimensioni in mm.

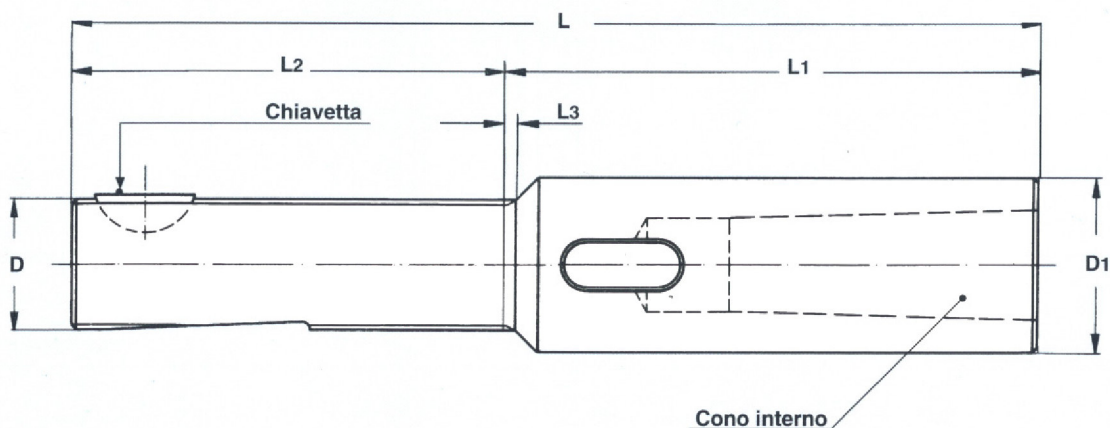

Esempio di ordinazione: PN. 16 Tr. - CM. 2

Attacchi diversi a richiesta

Tipo di mandrino	Cono interno	D	D1	L	L1	L2	L3	Chiavetta
PN. - ø 12 x 1,5 Tr.	0	12	18	135	73	62	3	3 x 5
PN. - ø 16 x 1,5 Tr.	1	16	20	164	79	85	3	5 x 6,5
PN. - ø 16 x 1,5 Tr.	2	16	25	179	94	85	3	5 x 6,5
PN. - ø 20 x 2 Tr.	2	20	28	182	94	88	3	5 x 7,5
PN. - ø 25 x 2 Tr.	3	25	36	212	117	95	3	6 x 9
PN. - ø 28 x 2 Tr.	3	28	36	212	117	95	3	6 x 9
PN. - ø 32 x 2 Tr.	4	32	45	264	146	118	3	8 x 11
PN. - ø 36 x 2 Tr.	4	36	48	266	146	118	3	8 x 11

Attacco CNOMO - Piccoli diametri C - NFE 62.261 - Diametri maggiorati C - NFE 62.264

Tipo di mandrino	Cono interno	D	D1	L	L1	L2	L3	Chiavetta
C. 08 x 1 Tr.	0	8	14	132 - 152	72 - 92	60	2	2x3,7
	1	8	14,5	137 - 157	77 - 97	60	2	
C. 10 x 1 Tr.	1	10	17	145 -165	77 - 97	68	2	3x5
C. 12 x 1,5 Tr.	1	12	18	150 - 170	78 - 98	72	3	3x5
	2	12	24	166 - 186	94 - 114	72	3	
C. 16 x 1,5 Tr.	2	16	25	179 - 204	94 - 119	85	3	3x5
				229 - 254	144 - 169			
C. 20 x 2 Tr.	2	20	25	214 - 239	94 - 119	120	3	5x6,5
				264 - 269	144 - 169			
	3	20	32	237 - 262	117 - 142	120	3	5x7,5
				287 - 312	167 - 192			
C. 28 x 2 Tr.	3	28	32	257 - 282	117 - 142	140	3	6x9
				307 - 332	167 - 192			
	4	28	40	286 - 311	146 - 171	140	3	6x9
				336 - 361	194 - 221			
C. 36 x 2 Tr.	4	36	40	316 - 366	146 - 196	170	3	8x11