




INSERTI PER INNESTI RAPIDI CON EMISSIONE REFRIGERANTE
TOOL HOLDERS FOR CHANGE DRILLING WITH COOLANT FLOW
POSTE UTIL A CHANGEMENT RAPIDE AVEC ARROSAGE CENTRAL
INSERTOS DE CAMBIO RAPIDO CON EMISSION DE REFRIGERANTE

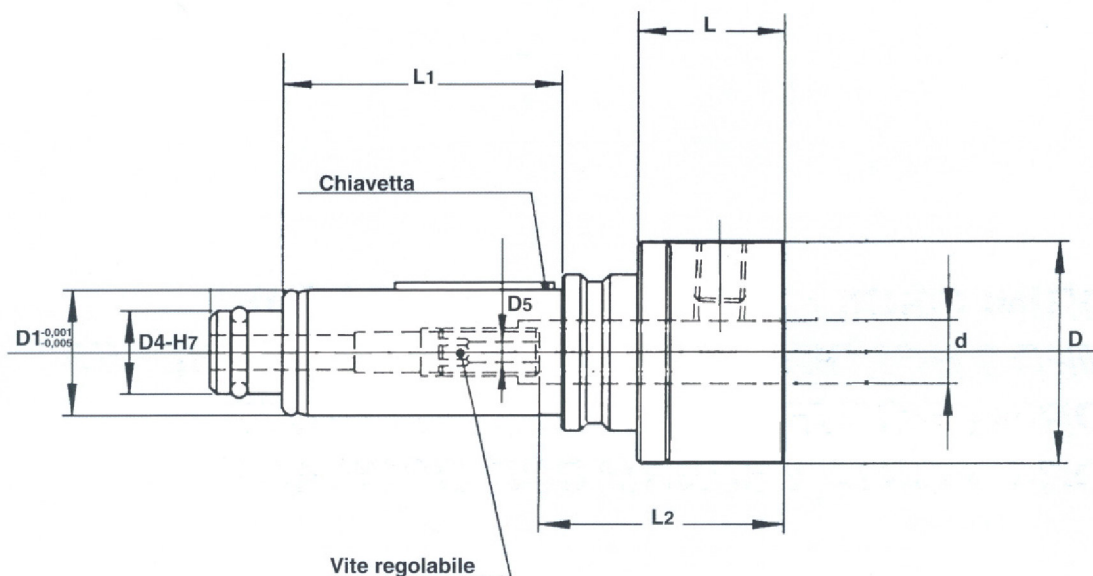

Esempio di ordinazione: ICRR.20 con D = 8 mm.

Dimensioni in mm.

Tipo di inserto refrigerante	d H5	Tipo di manicotto	D	D1	D4	D5	L	L1	L2		Chiavetta
									min.	max	
ICRR.16	6	MIRFA. 16	28	16	10	2,5	16	35	20	35	5 x 3 x 20
ICRR.16	8										
ICRR.20	8	MIRFA. 20	35	20	12	3	20	44	20	35	5 x 3 x 20
ICRR.20	10					4			24	39	
ICRR.20	12								29	44	
ICRR.25	10	MIRFA. 25	42	25	12	4	25	55	24	39	6 x 4 x 25
ICRR.25	12					4			29	44	
ICRR.25	16					5			32	47	
ICRR.28	12	MIRFA. 28	48	28	16	4	28	60	29	44	6 x 4 x 25
ICRR.28	16					5			32	47	
ICRR.28	20								34	49	
ICRR.32	12	MIRFA. 32	48	32	16	4	32	68	29	44	8 x 5 x 32
ICRR.32	16					5			32	47	
ICRR.32	20								34	49	
ICRR.36	16	MIRFA. 36	54	36	16	6	36	78	32	47	8 x 5 x 30
ICRR.36	20								34	49	
ICRR.36	25								39	54	
ICRR.48	20	MIRFA. 48	72	48	18	8	48	102	34	49	10 x 8 x 40
ICRR.48	25								39	54	
ICRR.48	30								41	56	
ICRR.48	32								43	58	