





DIMENSIONI ATTACCHI PER MANDRINI

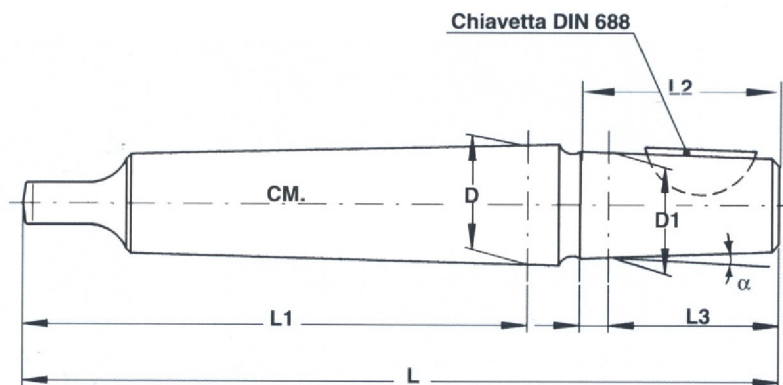

Attacco conico - DIN 238 con chiavetta e codulo CM. Tipo B

Dimensioni in mm.

Attacco	D1	a	CM.	D		L1		L2	L3	L		Inclinazione α	Chiavetta
B10	10,094	3,5	1-2	12,065	17,780	62	75	18	14,5	86	105	1°25'43"	3x5
B12	12,065	3,5	1-2	12,065	17,780	62	75	22	18,5	89	106	1°25'43"	4x7,5
B16	15,733	5	2-3	17,780	23,825	75	94	29	24	112	134	1°25'50"	4x7,5
B18	17,780	5	3-4	23,825	31,267	94	117,5	37	32	140	165	1°25'50"	5x9
B22	21,793	5	3-4	23,825	31,267	94	117,5	45,5	40,5	147	176	1°26'16"	5x9
B24	23,825	5	4-5	31,267	44,399	117,5	149,5	55,5	50,5	186	221	1°26'16"	6x9

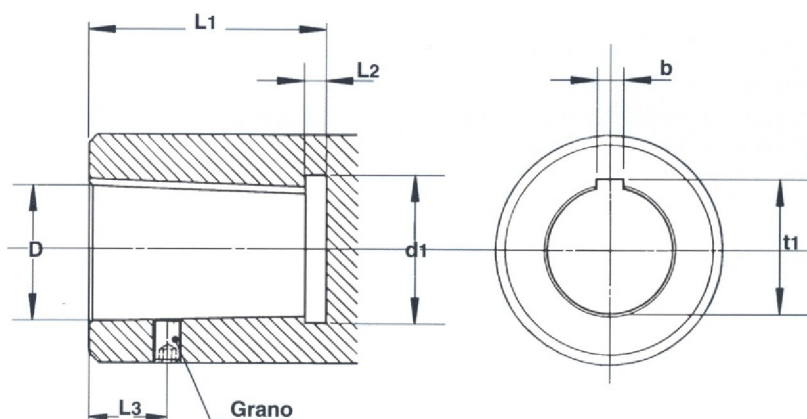

Attacco conico - DIN 238

Dimensioni in mm.

Attacco	D	d1	L1	L2	L3	b	t1					Inclinazione α	Grano
B10	10,094	12,4	8	18	3,5	3	11,4					1°25'43"	M5x5
B12	12,065	15,1	10	22	3,5	4	13,7					1°25'43"	M6x5
B16	15,733	18,4	12	28	4	4	17,4					1°25'50"	M6x5
B18	17,780	21,3	15	36	4	5	19,9					1°25'50"	M6x8
B22	21,793	24,5	18	45	4,5	5	23,9					1°26'16"	M8x10
B24	23,825	27,5	20	55	4,5	6	26,4					1°26'16"	M8x12