


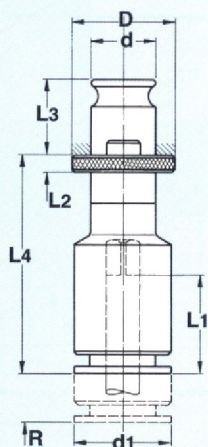
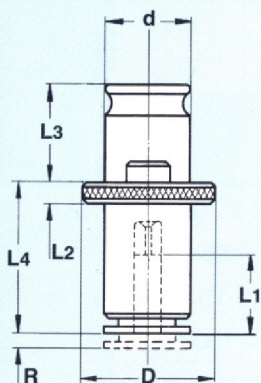


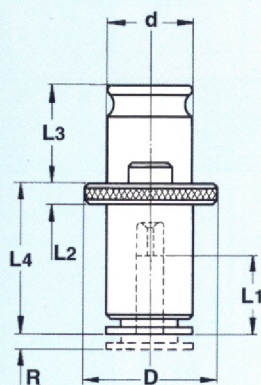

BUSSOLE PORTAMASCHIO A CAMBIO RAPIDO NORMALI **QUICK CHANGE TAPE HOLDING BUSHES NORMAL TYPE** **ADAPTEURS PORTE-TARAUDS À CHANGEMENT RAPIDE** **PINZA PORTA MACHOS DE CAMBIO RAPIDO NORMAL**

A richiesta anche con passaggio del refrigerante



“Tipo Normale”

Dimensioni in mm.

Tipo di Bussola	Campo di Filett.	Gambo del Maschio	D	d	L1	L2	L3	L4		
BAA	M1÷10	2,5÷7,2	22	13	15	4	19,5	7		
BAB	M6÷12	4,5÷11,2	30	19	17	4	21,5	7		
BAC	M10÷20	7÷18	48	31	30	5	35	11		
BAD	M16÷33	11÷28	70	48	44	6	55,5	14		
BA-40	M6÷18	6÷18	40	26	30	5	32	13		

“Tipo Normale con lunghezza regolabile”

Tipo di Bussola	Campo di Filett.	Gambo del Maschio	D	d	L1	L2	L3	L4		R
BAA-LR	M1÷10	2,5÷7,2	22	13	15	4	19,5	29		8
BAB-LR	M6÷12	4,5÷11,2	30	19	17	4	21,5	34		10
BAC-LR	M10÷20	7÷18	48	31	30	5	35	60		15
BAD-LR	M16÷33	11÷28	70	48	44	6	55,5	83		25
BA-40-LR	M6÷18	6÷18	40	26	30	5	32	54		15

“Tipo allungato con lunghezza regolabile”

Tipo di bussola	Campo di Filett.	Gambo del Maschio	D	d	L1	L2	L3	L4		R
BAL	M1÷10	2,5÷7,2	22	13	15	4	19,5	40-50-60-70-80-90-100		8
BBL	M6÷12	4,5÷11,2	30	19	17	4	21,5	40-50-60-70-80-90-100-110		10
BCL	M10÷20	7÷18	48	31	30	5	35	70-80-90-100-110-120-130		15
BDL	M16÷33	11÷28	70	48	44	6	55,5	100-120-140-160-180		25
B40L	M6÷18	6÷18	40	26	30	5	32	60-70-80-90-100-110-120		15

“Tipo con diametro maggiorato e lunghezza regolabile”

Tipo di Bussola	Campo di Filett.	Gambo del Maschio	D	d	L1	L2	L3	L4	d1	R
BA-0	M12÷14	7,2÷11,2	22	13	17	4	19,5	48	19	8
BA-1	M16÷18	11,2÷14	30	19	30	4	21,5	66	30	10
BA-2	M27÷30	18÷22	48	31	44	5	35	102	48	15
BA-40	M18÷24	14÷18	40	26	30	5	32	70	31	15

“Tipo per maschi maggiorati”

Tipo di Bussola	Campo di Filett.	Gambo del Maschio	D	d	L1	L2	L3			
BB	M16	> 11,2÷12	30	19	13	4	21,5			
BC	M27÷30	> 18÷22	48	31	20	5	35			
BD	M39÷48	> 28÷36	70	48	36	6	55,5			
B40	M18÷24	> 14÷18	40	26	20	5	32			